



RESIDENTIAL **SUNNY LUX** ALUMINUM DOOR

ALL-IN-ONE GLAZING SOLUTIONS

LEADTIME 2 WEEKS*



*CONSULT PRL FOR DETAILS

CONTACT



ALUMINUM: 877-775-2586 GLASS: 800-433-7044



www.prlglass.com

SUNNY LUX DOOR


FEATURES

- Designed for use in residential & commercial applications
- 4-point locking system
- Energy efficient and extreme weather resistance
- Fully mitered frame with ultra-narrow stiles
- Limitations: 48" W x 120" H & 250 lbs. max
- Impact & hurricane resistant glass (optional)
- Installer friendly
- Door thickness 2-7/8"
- Ultra-narrow vertical stiles 2-3/16"

ULTRA-NARROW VERTICAL STILES



4-POINT LOCK

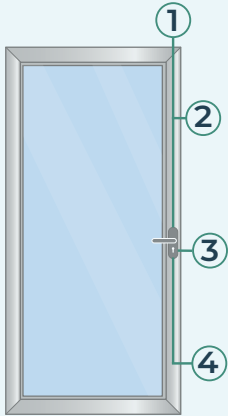

SMART LOCK

- Finger Prints
- Card Unlock
- Password
- Key Unlock



ADJUSTABLE JAMB

Both jambs are adjustable up to:



SUNNY LUX DOOR


CONFIGURATIONS




SINGLE DOORS




DOOR PAIRS




INSWING




OUTSWING




VERTICAL AND HORIZONTAL SECTIONS

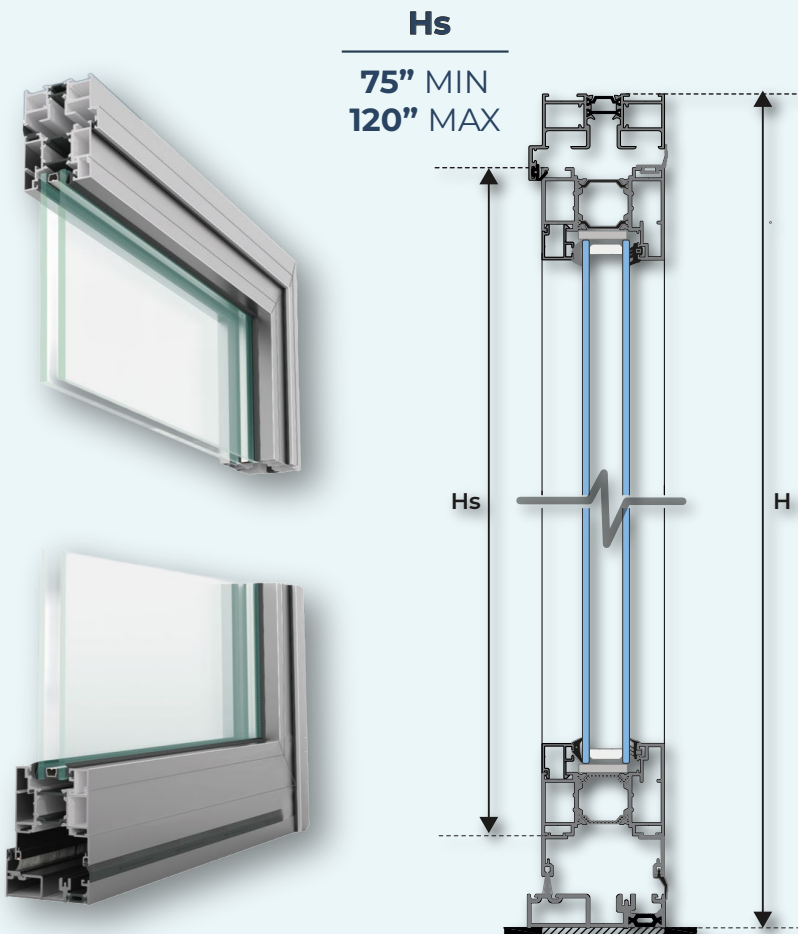

Ws
12" MIN
48" MAX

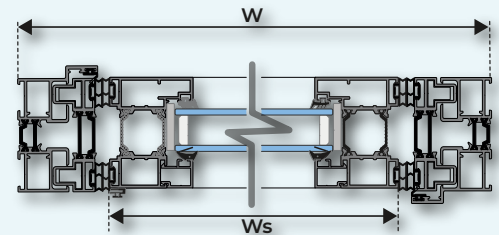

GLAZING TYPES



• 1 1/8" insulated glass units with varied colors and Low-E glass




• Optional impact resistant insulated glass for greater security levels

SUNNY LUX DOOR




ALUMINUM PROFILES


D1 - D2 - D3 - DOOR FRAME

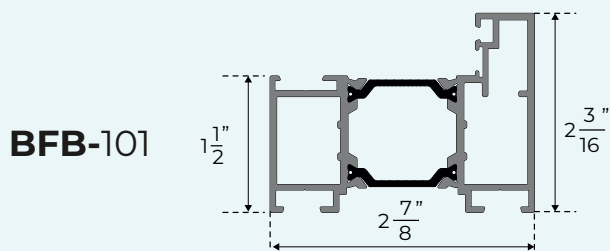


F1 HEAD - OUTER FRAME

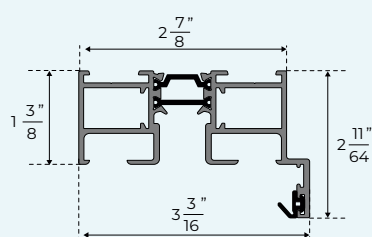


F2 ADJUSTABLE JAMB - OUTER FRAME



F3 - SILL OPTIONS - OUTER FRAME




LOW SILL DOUBLE RAMP



LOW SILL WITHOUT RAMP



HIGH SILL SINGLE RAMP



HIGH SILL WITHOUT RAMP

TEST PROCEDURES & RESULTS

SUCCESSFULLY TESTED IN NORTH AMERICA


- AAMA 1503-09 Thermal Performance:
0.40 (BTU/h·ft²·°F)
- ASTM E 547-00 (2009) Water Penetration:
150 Pa (3.13 psf) - PASS
- ASTM E 283-04 (2012) Air Leakage
Resistance: 0.26 cfm/ft² (Pass
AAMA/WDMA/CSA 101/I.S.2/A440 for air
leakage resistance.)
- ASTM E 330-14 Uniform Load Structural
Test: 30.08 psf (Positive & Negative)



DESIGN OPTIONS FOR CUSTOM SANDBLAST DESIGNS



ULTRA-NARROW
VERTICAL STILES

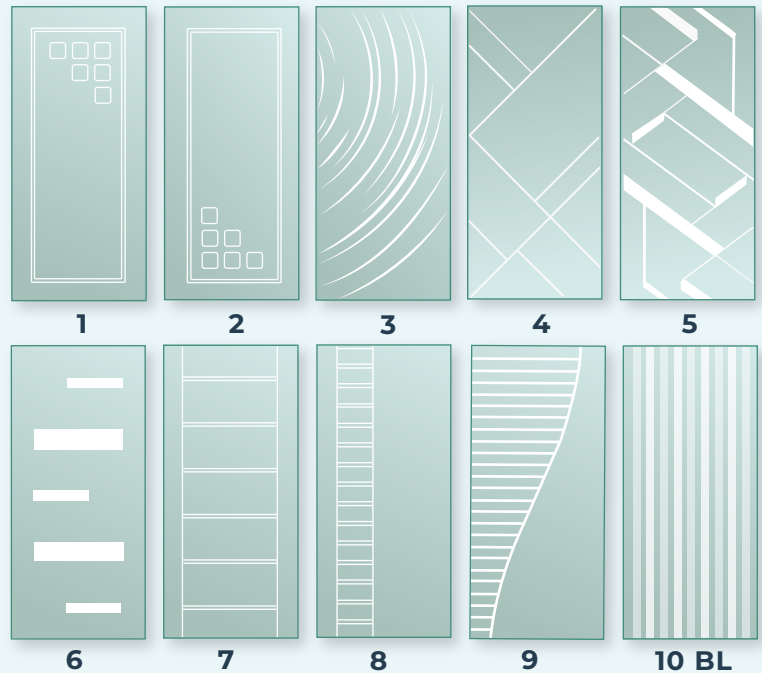

RELATED PRODUCTS

MAX SLIDERS



LEADTIME 2 WEEKS*

ACCORDION BIFOLD



LEADTIME 3 WEEKS*

ALUMINUM PRODUCTS

CURTAINWALLS



EXTRUSIONS



STOREFRONTS



COMMERCIAL BATTLE DOORS





PRL

GLASS SYSTEMS | **Aluminum**
ARCHITECTURAL PRODUCTS
Complete Glazing Solutions

ALL-GLASS PRODUCTS

HANDRAILS

LEADTIME 2-3 WEEKS*



ALL-GLASS DOORS WITH PANIC DEVICES

LEADTIME 7-10 DAYS*



SHOWER DOORS

LEADTIME 1-3 DAYS*



FULL-FRAME CLADDIED DOORS WITH PANIC DEVICE

LEADTIME 10-15 DAYS*



- Wide
- Medium
- Narrow
- Ultra Narrow

BULLET RESISTANT GLASS

LEADTIME 5 DAYS*



LEVELS 1 TO 8
1 2 3 4 5 6 7 8



High Ballistic Resistance
without excessive weight
from thickness (Levels 1-8)

INNOVATIVE PRODUCTS



PRL

GLASS
SYSTEMS

Aluminum
ARCHITECTURAL PRODUCTS
Complete Glazing Solutions

13644 Nelson Ave.
City of Industry, CA 91746

NEW!

ALUMINUM CASEMENT WINDOWS

NOW
AVAILABLE



SPANDREL GLASS



PRIVACY
GLASS

OFF

PRIVACY
GLASS

ON



SWITCH-IT PRIVACY GLASS

SECURITY DOOR & GLASS

No Bat, No Brick or Sledgehammer Stands a Chance!

BATTLE DOOR



BATTLE GLASS

MIRROVIEW™ GLASS



TV OFF

TV ON

CONTACT



ALUMINUM: 877-775-2586 GLASS: 800-433-7044



www.prlglass.com